

Technical Information

STG700 SmartLine Gauge Pressure Specification 34-ST-03-122, August 2017



Introduction

Part of the SmartLine® family of products, the STG700 Dual Head and STG700 Inline are suitable for monitoring, control and data acquisition. STG700 Dual Head products feature piezoresistive sensor technology combining pressure sensing with on chip temperature compensation capabilities providing high accuracy, stability and performance over a wide range of application pressures and temperatures. The SmartLine family is also fully tested and compliant with Experion® PKS providing the highest level of compatibility assurance and integration capabilities. SmartLine easily meets the most demanding application needs for pressure measurement applications.



Best in Class Features:

- Accuracy up to 0.065 % of calibrated span
- Stability up to 0.025% of URL per year for five years
- Automatic temperature compensation
- Rangeability up to 100:1
- Response times as fast as 100ms
- Easy to use and intuitive display capabilities
- Intuitive External zero & span capability
- On-board diagnostic capabilities
- Integral Dual Seal design for safety based on ANSI/NFPA 70-202 and ANSI/ISA 12.27.0
- Full compliance to SIL 2/3 requirements as a standard.

Communications/Output Options:

- HART® (version 7.0)

Figure 1 – STG700 Dual Head and Inline Gauge Pressure Transmitters

Span & Range Limits:

Model	URL/Max Span psi (bar)	LRL psi (bar)	Min Span	Turn down
STG735/STG73S	50 (3.5)	-14.7 (-1.0)	0.5 (0.035)	100:1
STG745/STG74S	500 (35)	-14.7 (-1.0)	5 (.35)	100:1
STG775/STG77S	3000 (210)	-14.7 (-1.0)	30 (2.1)	100:1
STG78S	6000 (420)	-14.7 (-1.0)	60 (4.2)	100:1
STG79S	10000 (690)	-14.7 (-1.0)	100 (6.9)	100:1

Description

The SmartLine family pressure transmitters are designed around a high performance piezo-resistive sensor. This one sensor integrates multiple sensors linking process pressure measurement with on-board static pressure (GP Models) and temperature compensation measurements.

Indication/Display Option

Standard LCD Display Features

- Modular (may be added or removed in the field)
- Supports HART protocol variant
- 0, 90, 180, & 270 degree position adjustments
- Configurable (HART only) and standard (Pa, KPa, MPa, KGcm², Torr, ATM, inH₂O, mH₂O, bar, mbar, inHG, FTH₂O, mmH₂O, mm HG, & psi) measurement units.
- 2 Lines 6 digits PV (9.95H x 4.20W mm) 8 Characters
- Square root output indication (✓) and Write protect Indication
- Built in Basic Device Configuration through Internal or External Buttons – Range/Engineering Unit/Loop Test /Loop Calibration/Zero /Span Setting

Diagnostics

SmartLine transmitters all offer digitally accessible diagnostics which aid in providing advanced warning of possible failure events minimizing unplanned shutdowns, providing **lower overall operational costs**

System Integration

- SmartLine communications protocols all meet the most current published standards for HART.
- All ST 700 units are Experion tested to provide the highest level of compatibility assurance

Configuration Tools

External Two Button Configuration Option

Suitable for all electrical and environmental requirements, SmartLine offers the ability to configure the transmitter and display, for all basic parameters, via two externally accessible buttons when a display option is selected. Zero/span capabilities are also optionally available via two external buttons with or without selection of the display option.

Internal Two Button Configuration Option

The Standard display has two buttons that can be used for Basic configuration such as re ranging, PV Engineering unit setting, Zero/Span settings, Loop testing and calibration functions.

Hand Held Configuration

SmartLine transmitters feature two-way communication and configuration capability between the operator and the transmitter. This is accomplished via Honeywell's field-rated Multiple Communication Configurator (MCT404). The MCT404 is capable of field configuring HART Devices and can also be ordered for use in intrinsically safe environments. All Honeywell transmitters are designed and tested for compliance with the offered communication protocols and are designed to operate with any properly validated hand held configuration device.

Personal Computer Configuration

Field Device Manager (FDM) Software and FDM Express are also available for managing HART device configurations.

Modular Design

To help contain maintenance & inventory costs, all ST 700 transmitters are modular in design supporting the user's ability to replace meter bodies, standard displays or electronic modules without affecting overall performance. Each meter body is uniquely characterized to provide intolerance performance over a wide range of application variations in temperature and pressure.

Modular Features

- Meter body replacement
- Add or remove standard displays
- Add or remove lightning protection (terminal connection)

With no performance effects, *Honeywell's unique modularity results in lower inventory needs and lower overall operating costs.*

Performance Specifications

Reference Accuracy: (conformance to +/-3 Sigma)

Table 1

Model	URL	LRL	Min Span	Maximum Turndown Ratio	Stability (% URL/Year for five years)	Reference Accuracy (% Span) ^{1,2}
Standard Accuracy	STG735	50 psi (3.5 bar)	-14.7 psi (-1.0 bar)	0.5 psi (.035 bar)	100:1	0.0650%
	STG73S	50 psi (3.5 bar)	-14.7 psi (-1.0 bar)	0.5 psi (.035 bar)		
	STG745	500 psi (35 bar)	-14.7 psi (-1.0 bar)	5 psi (.35 bar)		
	STG74S	500 psi (35 bar)	-14.7 psi (-1.0 bar)	5 psi (.35 bar)		
	STG775	3000 psi (210 bar)	-14.7 psi (-1.0 bar)	30 psi (2.1 bar)		
	STG77S	3000 psi (210 bar)	-14.7 psi (-1.0 bar)	30 psi (2.1 bar)		
	STG78S	6000 psi (420 bar)	-14.7 psi (-1.0 bar)	60 psi (4.2 bar)		
	STG79S	10000 psi (690 bar)	-14.7 psi (-1.0 bar)	100 (6.9 bar)		

Zero and span may be set anywhere within the listed (URL/LRL) range limits

Accuracy, Span and Temperature Effect: (Conformance to +/-3 Sigma)

Table 2

		Accuracy ^{1,2,3} (% of Span)			Temperature Effect (% Span/50°F)		
Model	URL	For Turndowns Greater Then	A	B	C psi (bar)	D	E
Standard Accuracy	STG735	50 psi (3.5 bar)	17:1	0.025	3 (0.21)	0.070	0.008
	STG73S	50 psi (3.5 bar)	8:1		6 (0.4)	0.100	0.015
	STG745	500 psi (35 bar)	20:1		25 (1.7)	0.075	0.013
	STG74S	500 psi (35 bar)	20:1		25 (1.7)	0.100	0.020
	STG775	3000 psi (210 bar)	8.5:1		350 (24.1)	0.075	0.013
	STG77S	3000 psi (210 bar)	8.5:1		350 (24.1)	0.100	0.025
	STG78S	6000 psi (420 bar)	10:1		600 (42)	0.100	0.070
	STG79S	10000 psi (690 bar)	8:1		1250 (86)	0.200	0.170
		Turn Down Effect $\pm \left[A + B \left(\frac{C}{\text{Span}} \right) \right]$			Temp Effect $\pm \left[+ \left(\frac{\text{URL}}{\text{Span}} \right) \right]$ % Span per 28°C (50°F)		

Total Performance (% of Span):

Total Performance Calculation: = +/- $\sqrt{(\text{Accuracy})^2 + (\text{Temperature Effect})^2}$

Total Performance Examples (for comparison): @ 5:1 Turndown, +/-50 °F (28°C) shift

STG735 @ 10 psi: 0.128% of span

STG745 @ 100 psi: 0.154% of span

STG775 @ 600 psi: 0.154 % of span

STG78S @ 1200 psi: 0.455% of span

STG73S @ 10 psi: 0.187% of span

STG74S @ 100 psi: 0.210% of span

STG77S @ 600 psi: 0.234% of span

STG79S @ 2000 psi: 1.052% of span

Typical Calibration Frequency:

Calibration verification is recommended every two (2) years

Notes:

¹. Terminal Based Accuracy - Includes combined effects of linearity, hysteresis, and repeatability. Analog output adds 0 .006% of span.

². For zero based spans and reference conditions of: 25 °C (77 °F) for LRV >= 0 psia, 10 to 55% RH, and 316 Stainless Steel barrier diaphragm.

3. STG735 and STG73S, for LRV<0 and/or URV<0, B = 1.25 and E = 0.25

Operating Conditions – All Models

Parameter	Reference Condition		Rated Condition		Operative Limits		Transportation and Storage							
	°C	°F	°C	°F	°C	°F	°C	°F						
Ambient Temperature¹	25±1	77±2	-40 to 85	-40 to 185	-40 to 85	-40 to 185	-55 to 120	-67 to 248						
Meter Body Temperature	25±1	77±2	-40 to 110	-40 to 230	-40 to 125	-40 to 257	-55 to 120	-67 to 248						
Humidity %RH	10 to 55		0 to 100		0 to 100		0 to 100							
Vac. Region – Min. Pressure mmHg absolute inH ₂ O absolute	Atmospheric		25		2 (short term) ²		1 (short term) ²							
Supply Voltage		10.8 to 42.4 Vdc at terminals												
Load Resistance		0 to 1,440 ohms (as shown in Figure 2)												
Maximum Allowable Working Pressure (MAWP)^{3, 4} <small>(ST700 products are rated to Maximum Allowable Working Pressure. MAWP depends on Approval Agency and transmitter materials of construction.)</small>	STG735: 50 psi (3.5 bar)		STG73S: 50 psi (3.5 bar)		STG745: 500 psi (35 bar)		STG74S: 500 psi (35 bar)							
	STG775: 3000 psi (210 bar)		STG77S: 3000 psi (210 bar)		STG78S: 6000 psi (420 bar)		STG79S: 10000 psi (690 bar)							

¹ LCD Display operating temperature -20°C to +70°C Storage temperature -30°C to 80°C.

² Short term equals 2 hours at 70°C (158°F)

³ Units can withstand overpressure of 1.5 x MAWP without damage

⁴ Consult the factory for MAWP of ST 700 transmitters with CRN approval

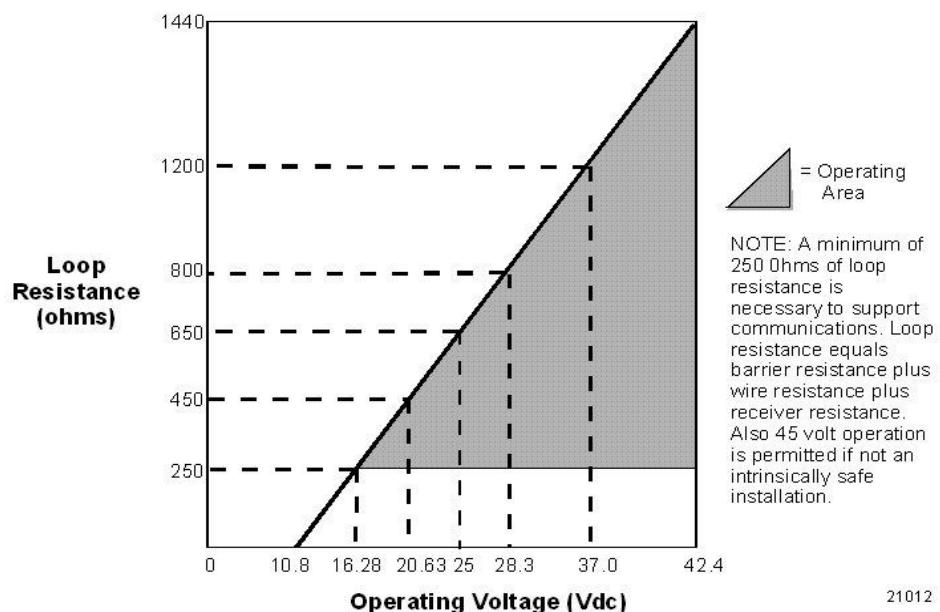


Figure 2 - Supply voltage and loop resistance chart & calculations

Performance Under Rated Conditions – All Models

Parameter	Description	
Analog Output Digital Communications:	Two-wire, 4 to 20 mA HART7	
HART Output Failure Modes	Honeywell Standard: Normal Limits: 3.8 – 20.8 mA Failure Mode: ≤ 3.6 mA and ≥ 21.0 mA	NAMUR NE 43 Compliance: 3.8 – 20.5 mA ≤ 3.6 mA and ≥ 21.0 mA
Supply Voltage Effect	0.005% span per volt.	
Transmitter Turn on Time (includes power up & test algorithms)	2.5 sec	
Response Time (delay + time constant)	100ms	
Damping Time Constant	Adjustable from 0 to 32 seconds in 0.1 increments. Default Value: 0.5 seconds	
Vibration Effect:	Less than +/- 0.1% of URL w/o damping Per IEC60770-1 field or pipeline, high vibration level (10-2000Hz: 0.21 displacement/3g max acceleration)	
Electromagnetic Compatibility	IEC 61326-3-1	
Lightning Protection Option	Leakage Current: 10uA max @ 42.4VDC 93C Impulse rating: 8/20uS 5000A (>10 strikes) 10000A (1 strike min.) 10/1000uS 200A (> 300 strikes)	

Materials Specifications (see model selection guide for availability/restrictions with various models)

Parameter	Description
Barrier Diaphragms Material	STG700 Dual Head: 316L SS, Hastelloy® C-276 ² STG700 Inline: 316L SS, Hastelloy® C-276 ²
Process Head Material	STG700 Dual Head: Carbon Steel (Zinc Plated) ⁵ , 316 SS ⁴ , Hastelloy® C-276 ⁶ STG700 Inline: 316L SS, Hastelloy® C-276 ⁶
Vent/Drain Valves & Plugs ¹	STG700 Dual Head: 316 SS ⁴ , Hastelloy® C-276 ² STG700 Inline: N/A
Head Gaskets	STG700 Dual Head: Glass-filled PTFE standard. Viton® and graphite are optional. STG700 Inline: N/A
Meter Body Bolting	STG700 Dual Head: Carbon Steel (Zinc plated) standard. Options include 316 SS, NACE A286 SS bolts and nuts or NACE A286 SS bolts and 304 SS nuts, and Super Duplex. STG700 Inline: N/A
Mounting Bracket	Carbon Steel (Zinc-plated) or 304 or 316 Stainless Steel, See Figures 4 & 5
Fill Fluid	Silicone, CTFE
Electronic Housing	Pure Polyester Powder Coated Low Copper (<0.4%)-Aluminum. Meets NEMA 4X, IP66, IP67 and NEMA 7 (explosion proof). All stainless steel housing is optional.
Process Connections	STG700 Dual Head: ½ -inch NPT(female) STG700 Inline: ½ -inch NPT(female), ½ -inch NPT male, 9/16 Aminco, G1½ -B Male Thread
Wiring	Accepts up to 16 AWG (1.5 mm diameter).
Dimensions	See Figure 3 and Figure 4
Net Weight	STG700 Dual Head: 8.3 pounds (3.8 Kg). STG700 Inline: 3.6 pounds (1.6 Kg) with Aluminum Housing

¹ Vent/Drains are sealed with Teflon®² Hastelloy® C-276 or UNS N10276⁴ Supplied as 316 SS or as Grade CF8M, the casting equivalent of 316 SS.⁵ Carbon Steel heads are zinc-plated and not recommended for water service due to hydrogen migration. For that service, use 316 stainless steel wetted Process Heads.⁶ Hastelloy® C-276 or UNS N10276. Supplied as indicated or as Grade CW12MW, the casting equivalent of Hastelloy® C-276

Communications Protocols & Diagnostics

HART Protocol

Version:

HART 7

Power Supply

Voltage: 10.8 to 42.4Vdc at terminals

Load: Maximum 1440 ohms See [Figure 2](#)

Minimum Load: 0 ohms. (For handheld communications a minimum load of 250 ohms is required)

Standard Diagnostics

ST 700 top level diagnostics are reported as either critical or non-critical and readable via the DD/DTM tools or integral display as shown.

Critical Diagnostics

HART DD/DTM Tools	Standard Display
Electronic Module DAC Failure	Fault Comm El
Meter Body NVM Corrupt	Fault Mtrbody
Config. Data Corrupt	Fault Comm El
Electronic Module Diag Failure	Fault Comm El
Meter Body Critical Failure	Fault Mtrbody
Sensor Comms Timeout	Fault Mbd Com

Non-Critical Diagnostics

HART DD/DTM Tools
Display Failure
Electronic Module Comm Failure
Meter Body Excess Correct
Sensor Over Temperature
Fixed Current Mode
PV Out of Range
No Factory Calibration
LRV Set Error – Zero Config. Button
URV Set Error – Zero Config. Button
AO Out of Range
Loop Current Noise
Meter Body Unreliable Comm
No DAC Calibration
Sensor Supply Voltage Low

Refer to ST 700 manuals for additional level diagnostic information.

Approval Certifications:

AGENCY	TYPE OF PROTECTION	FIELD PARAMETERS	AMBIENT TEMP (Ta)
FM Approvals™	Explosionproof: Class I, Division 1, Groups A, B, C, D; Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G; Class I, Zone 0/1, AEx d IIC Ga/Gb Class II, Zone 21, AEx tb IIIC Db T 95°C	Note 1	T5: -50 °C to 85°C T6: -50 °C to 65°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G Class I, Zone 0, AEx ia IIC Ga		T4: -50 °C to 70°C
	Nonincendive: Class I, Division 2, Groups A, B, C, D locations, Class I, Zone 2, AEx nA IIC Gc	Note 1	T4: -50 °C to 85°C
	Enclosure: Type 4X/ IP66/ IP67	All	-
Canadian Standards Association (CSA)	Explosion Proof: Class I, Division 1, Groups A, B, C, D; Dust Ignition Proof: Class II, III, Division 1, Groups E, F, G; Ex d IIC Ga Ex tb IIIC Db T 95°C	Note 1	T5: -50 °C to 85°C T6: -50 °C to 65°C
	Intrinsically Safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G Ex ia IIC Ga		T4: -50 °C to 70°C
	Nonincendive: Class I, Division 2, Groups A, B, C, D; T4 Ex nA IIC Gc	Note 1	T4: -50 °C to 85°C
	Enclosure: Type 4X/ IP66/ IP67	All	-
ATEX	Flameproof: II 1/2 G Ex d IIC Ga/Gb II 2 D Ex tb IIIC Db T 95°C	Note 1	T5: -50 °C to 85°C T6: -50 °C to 65°C
	Intrinsically Safe: II 1 G Ex ia IIC Ga		T4: -50 °C to 70°C
	Nonincendive: II 3 G Ex nA IIC Gc	Note 1	T4: -50 °C to 85°C
	Enclosure: IP66/ IP67	All	-

Approval Certifications: (Continued)

IECEx (World)	Flameproof : Ex d IIC Ga/Gb Ex tb IIIC Db T 95°C	Note 1	T5: -50 °C to 85°C T6: -50 °C to 65°C
	Intrinsically Safe: Ex ia IIC Ga		T4: -50 °C to 70°C
	Nonincendive: Ex nA IIC Gc	Note 1	T4: -50 °C to 85°C
	Enclosure: IP66/ IP67	All	-
NEPSI (China)	Flameproof: Ex d IIC Ga/Gb Ex tb IIIC Db T 85°C	Note 1	T5: -50 °C to 85°C T6: -50 °C to 65°C
	Intrinsically Safe: Ex ia IIC Ga		T4: -50 °C to 70°C
	Nonincendive: Ex nA IIC Gc	Note 1	T4: -50 °C to 85°C
	Enclosure : IP 66/67	All	-

Notes:

- Operating Parameters:
Voltage= 11 to 42 V DC Current= 4-20 mA Normal

Other Certification Options

Materials


- NACE MRO175, MRO103, ISO15156

SIL 2/3 Certification	IEC 61508 SIL 2 for non-redundant use and SIL 3 for redundant use according to EXIDA and TÜV Nord Sys Tec GmbH & Co. KG under the following standards: IEC61508-1: 2010; IEC 61508-2: 2010; IEC61508-3: 2010.
------------------------------	---

Mounting & Dimensional Drawings

Reference Dimensions: millimeters
inches

Mounting Configurations: (Dual head design)

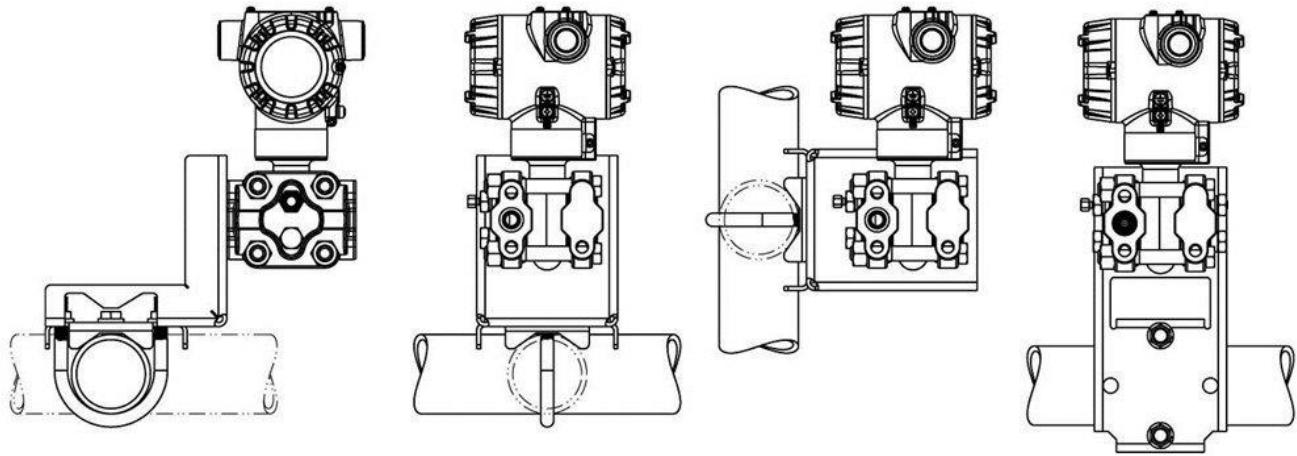

Dimensions: (Dual head design)


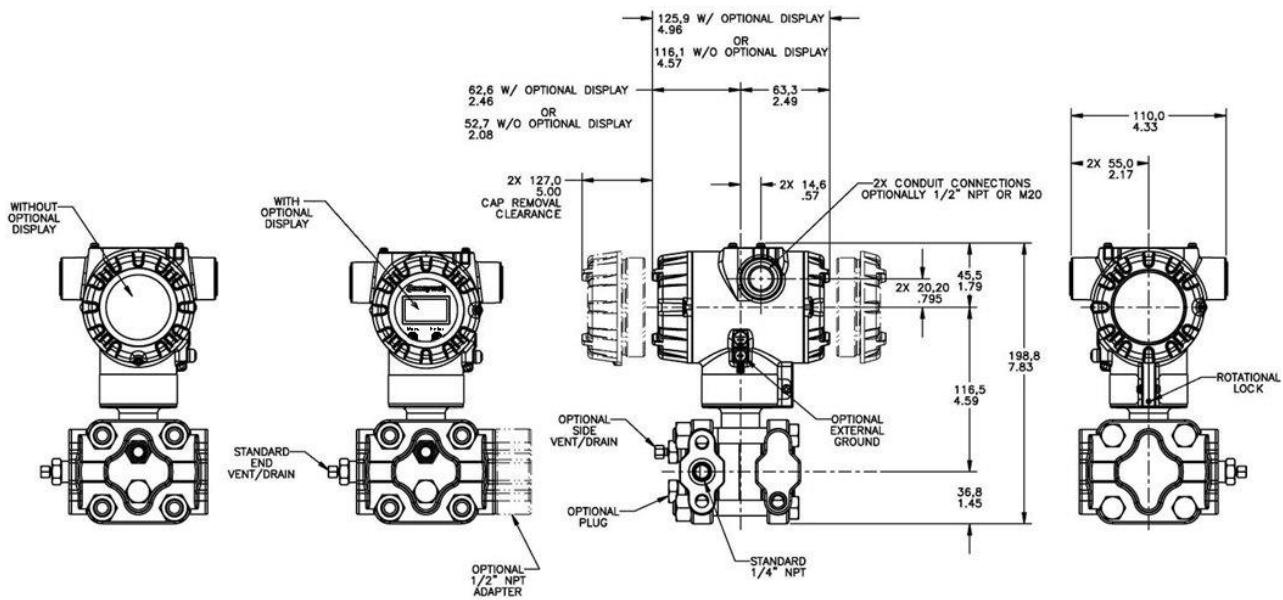


Figure 3 – Typical mounting dimensions of STG735, STG745 & STG775 for reference

Refer to the User's manual (34-ST-25-44) for full details on mounting and installation.

Reference Dimensions: millimeters
inches

Mounting Configurations (Inline Designs)

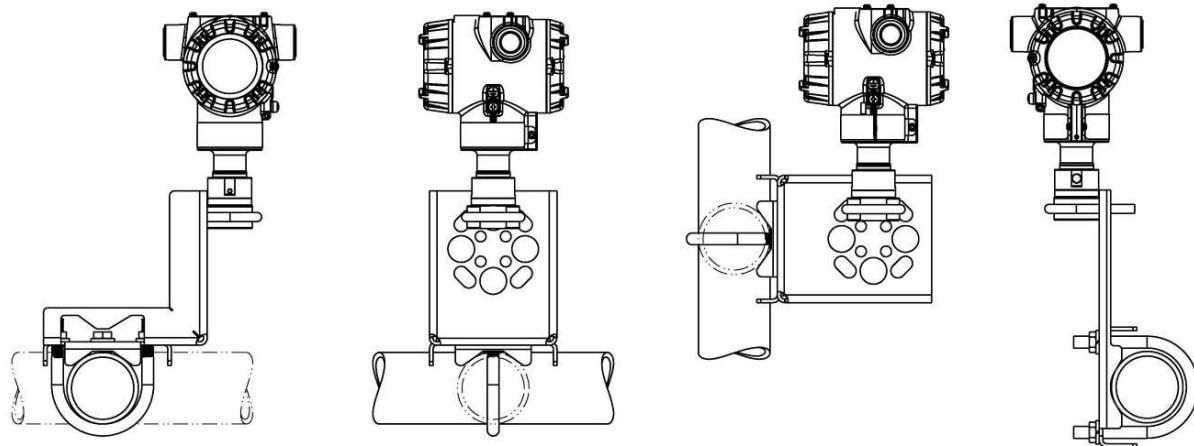

Dimension (Inline Design)

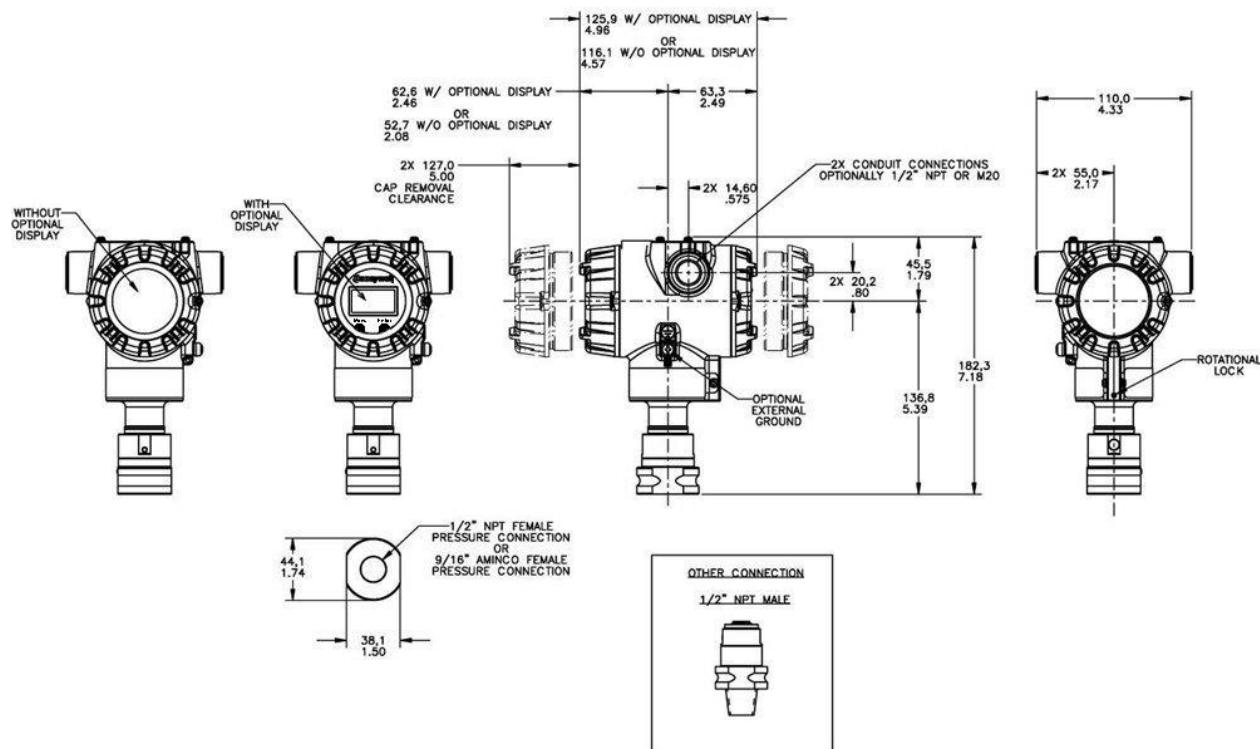


Figure 4 – Typical mounting dimensions of STG74S, STG77S, STG78S, & STG79S for reference

Refer to the User's manual (34-ST-25-44) for full details on mounting and installation.

Model Selection Guides are subject to change and are inserted into the specifications as guidance only.
 Prior to specifying or ordering a model check for the latest revision Model Selection Guides which are published at:
www.honeywellprocess.com/en-US/pages/default.aspx

Model Selection Guide

Model STG700 Gauge Pressure Transmitters

Model Selection Guide

34-ST-16-122 Issue 1

Instructions: Make selections from all Tables using column below the proper arrow. Asterisk indicates availability. Letter (a) refers to restrictions highlighted in the restrictions table. Tables delimited with dashes.

Key	I	II	III	IV	V	VI	VII	VIII	IX
STG7__	-	-	-	-	-	-	-	-	0 0 0

KEY NUMBER	URL/Max Span	LRL	Min Span	Units
Gauge Dual Head	50 (3.5)	-14.7 (-1.0)	0.5 (.035)	psi (bar)
	500 (35)	-14.7 (-1.0)	5 (.35)	psi (bar)
	3000 (210)	-14.7 (-1.0)	30 (2.1)	psi (bar)
Gauge In-Line	50 (3.5)	-14.7 (-1.0)	0.5 (.035)	psi (bar)
	500 (35)	-14.7 (-1.0)	5 (.35)	psi (bar)
	3000 (210)	-14.7 (-1.0)	30 (2.1)	psi (bar)
	6000 (420)	-14.7 (-1.0)	60 (4.2)	psi (bar)
	10000 (690)	-14.7 (-1.0)	100 (6.9)	psi (bar)

Selection	Availability
STG735	↓
STG745	↓
STG775	↓
STG73S	
STG74S	↓
STG77S	↓
STG78S	↓
STG79S	↓

TABLE I METER BODY SELECTIONS				
a. Process Head & Diaphragm Materials	Process Head/Reference Head Material ^{1b}			Barrier Diaphragm Material
	Plated Carbon Steel			316L SS Hastelloy® C - 276
	316 Stainless Steel			316L SS Hastelloy C - 276
	Hastelloy C - 276/316 Stainless Steel			Hastelloy C - 276
b. Fill Fluid	Silicone Oil 200 Fluorinated Oil CTFE			
c. Process Connection	Size/Type	Material		
c. Process Connection	9/16" Aminco	Same as Process Head		
	1/2" NPT (female)	Same as Process Head ^{1a}		
	1/2" NPT (male)	Same as Process Head		
	G 1/2 B Threaded Fitting	Same as Process Head		
d. Bolt/Nuts Materials	None Carbon Steel 316 SS Grade 660 (NACE A286) with NACE 304 SS Nuts Grade 660 (NACE A286) Bolts & Nuts Super Duplex			
e. Vent/Drain Type/Location	Head Type	Vent Type	Location	Vent Material
e. Vent/Drain Type/Location	None	None	None	None
	Single Ended	None	None	None
	Single Ended	Standard Vent	Side	Matches Head Material ¹
	Single Ended	Center Vent	Side	Stainless Steel Only
	Dual Ended	Standard Vent	End	Matches Head Material ¹
	Dual Ended	Center Vent	End	Stainless Steel only
	Dual Ended	Std Vent/Plug	Side/End	Matches Head Material ¹
f. Gasket Materials	None Teflon® or PTFE (Glass Filled) Viton® Graphite			

A-----	*	*		
B-----	*	*		
E-----	*	*	*	*
F-----	*	*	*	*
J-----	*	*	*	*
-----1	*	*	*	*
-----2	*	*	*	*

--A---			*	*
--G---	*	*	*	*
--H---		*	*	*
--B		*	*	*
--0--		*	*	*
--C--	*	*		
--S--	*	*		
--N--	p	p		
--K--	p	p		
--D--	p	p		

----0-			*	*
----1-	*	*		
----2-	*	*		
----3-	t	t		
----4-	*	*		
----5-	t	t		
----6-	*	*		
----0-			*	*
----A-	*	*		
----B-	*	*		
----C-	*	*		

¹ Except Carbon Steel Heads shall use 316SS Vent/Drain & Plugs and or 1/2" adapters

^{1a} STG735,745,775 supplied via 1/2" flange adapter same material as process head except carbon steel shall use 316 SS

^{1b} Reference head available with Dual Head Gage models only. In-Line Gage models are supplied with Process Head only.

STANDARD SELECTION 1 ⁴	REVERSED SELECTION 2	90°/STANDARD SELECTION 3
--------------------------------------	-------------------------	-----------------------------

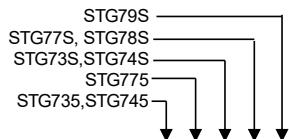
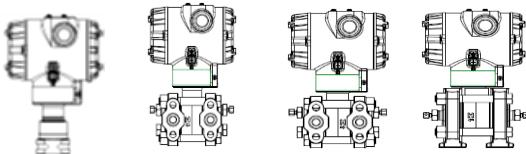


TABLE II		Meter Body & Connection Orientation
Head/Connect	Standard	High Side Left, Ref Side Right ² / Std Head Orientation
Orientation	Reversed	Ref Side Left, High Side Right ²
	90/Standard	High Side Left, Ref Side Right ² / 90° Head Rotation

1	*	*	*	*	*
2	*	*			
3	h	h			

TABLE III		AGENCY APPROVALS
Approvals		No Approvals Required <FM> Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof CSA Explosion proof, Intrinsically Safe, Non-incendive, & Dustproof ATEX Explosion proof, Intrinsically Safe & Non-incendive IECEx Explosion proof, Intrinsically Safe & Non-incendive NEPSI Explosion proof, Intrinsically Safe & Non-incendive

0	*	*	*	*	*
A	*	*	*	*	*
B	*	*	*	*	*
C	*	*	*	*	*
D	*	*	*	*	*
E	*	*	*	*	*
F	*	*	*	*	*
G	*	*	*	*	*
H	*	*	*	*	*

TABLE IV		TRANSMITTER ELECTRONICS SELECTIONS		
a. Electronic Housing Material & Connection Type	Material		Connection	Lightning Protection
	Polyester Powder Coated Aluminum	1/2 NPT		None
	Polyester Powder Coated Aluminum	M20		None
	Polyester Powder Coated Aluminum	1/2 NPT		Yes
	Polyester Powder Coated Aluminum	M20		Yes
	316 Stainless Steel (Grade CF8M)	1/2 NPT		None
	316 Stainless Steel (Grade CF8M)	M20		None
	316 Stainless Steel (Grade CF8M)	1/2 NPT		Yes
b. Output/Protocol	Analog Output		Digital Protocol	
	4-20mA dc		HART Protocol	
c. Customer Interface Selections	Indicator	Ext Zero,Span & Config Buttons	Languages	
	None	None	None	
	None	Yes (Zero/Span Only)	None	
	Standard(w/Internal Zero,Span&Config buttons)	None	EN	
	Standard(w/Internal Zero,Span&Config buttons)	Yes	EN	

A __	*	*	*	*	*
B __	*	*	*	*	*
C __	*	*	*	*	*
D __	*	*	*	*	*
E __	*	*	*	*	*
F __	*	*	*	*	*
G __	*	*	*	*	*
H __	*	*	*	*	*
H	*	*	*	*	*
-- 0	*	*	*	*	*
-- A	*	*	*	*	*
-- S	*	*	*	*	*
-- T	*	*	*	*	*

TABLE V		CONFIGURATION SELECTIONS		
a. Application Software		Diagnostics		
		Standard Diagnostics		
b. Output Limit, Failsafe & Write Protect Settings	Write Protect	Fail Mode	High & Low Output Limits ³	
	Disabled	High> 21.0mAdc	Honeywell Std	(3.8 - 20.8 mAdc)
	Disabled	Low< 3.6mAdc	Honeywell Std	(3.8 - 20.8 mAdc)
	Enabled	High> 21.0mAdc	Honeywell Std	(3.8 - 20.8 mAdc)
c. General Configuration	General Configuration			
	Factory Standard			
	Custom Configuration (Unit Data Required from customer)			

1 __	*	*	*	*	*
- 1 __	*	*	*	*	*
- 2 __	*	*	*	*	*
- 3 __	*	*	*	*	*
- 4 __	*	*	*	*	*
-- S	*	*	*	*	*
-- C	*	*	*	*	*

² Left side/Right side as viewed from the customer connection perspective

³ NAMUR Output Limits are configurable by customer

⁴ Process connections will vary on In-Line Models

TABLE VI CALIBRATION & ACCURACY SELECTIONS			
a. Accuracy and Calibration	Accuracy	Calibrated Range	Calibration Qty
	Standard Standard	Factory Standard Custom (Unit Data Required)	Single Calibration Single Calibration

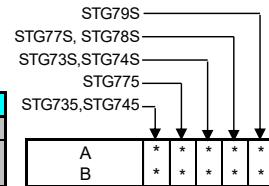


TABLE VII ACCESSORY SELECTIONS		
a. Mounting Bracket	Bracket Type	Material
	None	None
	Angle Bracket	Carbon Steel
	Angle Bracket	304 SS
	Angle Bracket	316 SS
	Flat Bracket	Carbon Steel
	Flat Bracket	304 SS
	Flat Bracket	316 SS
b. Customer Tag	Customer Tag Type	
	No customer tag	
c. Unassembled Conduit Plugs & Adapters	One Wired Stainless Steel Tag (Up to 4 lines 26 char/line)	
	Unassembled Conduit Plugs & Adapters	
	No Conduit Plugs or Adapters Required	
	1/2 NPT Male to 3/4 NPT Female 316 SS Certified Conduit Adapter	
1/2 NPT 316 SS Certified Conduit Plug		M20 316 SS Certified Conduit Plug

0	*	*	*	*	*	*
1	*	*	*	*	*	*
2	*	*	*	*	*	*
3	*	*	*	*	*	*
5	*	*	*	*	*	*
6	*	*	*	*	*	*
7	*	*	*	*	*	*
-0	*	*	*	*	*	*
-1	*	*	*	*	*	*
--A0	*	*	*	*	*	*
--A2	n	n	n	n	n	n
--A6	n	n	n	n	n	n
--A7	m	m	m	m	m	m

TABLE VIII OTHER Certifications & Options: (String in sequence comma delimited (XX, XX, XX,...))	
Certifications & Warranty	No additional options NACE MR0175; MR0103; ISO15156 Process wetted parts only NACE MR0175; MR0103; ISO15156 Process wetted and non-wetted parts EN10204 Type 3.1 Material Traceability Certificate of Conformance Calibration Test Report & Certificate of Conformance Certificate of Origin FMEDA (SIL 2/3) Certification Over-Pressure Leak Test Certificate (1.5X MAWP) Cert Clean for O ₂ or Cl ₂ service per ASTM G93 PM Certification ⁵ Extended Warranty Additional 1 year Extended Warranty Additional 2 years Extended Warranty Additional 3 years Extended Warranty Additional 4 years

00	*	*	*	*	*	*
FG	*	*	*	*	*	*
F7	c	c	c	c	c	b
FX	*	*	*	*	*	*
F3	*	*	*	*	*	*
F1	*	*	*	*	*	*
F5	*	*	*	*	*	*
FE	j	j	j	j	j	
TP	*	*	*	*	*	*
OX	e	e	e	e	e	
PM	*	*	*	*	*	*
01	*	*	*	*	*	*
02	*	*	*	*	*	*
03	*	*	*	*	*	*
04	*	*	*	*	*	*

TABLE IX Manufacturing Specials	
Factory	Factory Identification

0	0	0	*	*	*	*
---	---	---	---	---	---	---

RESTRICTIONS

Restriction Letter	Available Only with		Not Available with		
	Table	Selection(s)	Table	Selection(s)	
c	Ia	0,N,K,D			
e	Ib	2			
h			le		4, 5, 6
			Vla		1,2,3,5,6,7
j			Vb		1,2
m	IVa	B,D,F,H			
n	IVa	A,C,E,G			
p			III		B- No CRN number available
t			la		J
b		Select Only one option from this group			

⁵ The PM option is available on all Smartline Pressure Transmitter process wetted parts such as process heads, flanges, bushings and vent plugs except plated carbon steel process heads and flanges. PM option information is also available on diaphragms except STG and STA inline construction pressure transmitters.

FIELD INSTALLABLE ACCESSORY KITS

Description
Terminal Strip w/Lightning Protection Kit for HART
Terminal Strip w/o Lightning Protection for HART Modules
HART Electronics Module
HART Electronics Module w/connection for external configuration buttons
Standard Display Module

Kit Number
50129832-501
50129832-502
50129828-501
50129828-502
50126003-501

Sales and Service

For application assistance, current specifications, pricing, or name of the nearest Authorized Distributor, contact one of the offices below.

ASIA PACIFIC

Honeywell Process Solutions,
(TAC) hfs-tac-support@honeywell.com

Australia

Honeywell Limited
Phone: +(61) 7-3846 1255
FAX: +(61) 7-3840 6481
Toll Free 1300-36-39-36
Toll Free Fax:
1300-36-04-70

China – PRC - Shanghai

Honeywell China Inc.
Phone: (86-21) 5257-4568
Fax: (86-21) 6237-2826

Singapore

Honeywell Pte Ltd.
Phone: +(65) 6580 3278
Fax: +(65) 6445-3033

South Korea

Honeywell Korea Co Ltd
Phone: +(822) 799 6114
Fax: +(822) 792 9015

EMEA

Honeywell Process Solutions,
Phone: + 80012026455 or
+44 (0)1344 656000

Email: (Sales)

FP-Sales-Apps@Honeywell.com

or

(TAC)

hfs-tac-support@honeywell.com

AMERICA'S

Honeywell Process Solutions,
Phone: (TAC) 1-800-423-9883 or
215/641-3610
(Sales) 1-800-343-0228

Email: (Sales)

FP-Sales-Apps@Honeywell.com

or

(TAC)

hfs-tac-support@honeywell.com

Specifications are subject to change without notice.

For more information

To learn more about SmartLine Pressure
Transmitters visit www.honeywellprocess.com
Or contact your Honeywell Account Manager

Process Solutions

Honeywell
1250 W Sam Houston Pkwy S
Houston, TX 77042

Honeywell Control Systems Ltd
Honeywell House, Skimmed Hill Lane
Bracknell, England, RG12 1EB

Shanghai City Centre, 100 Jungi Road
Shanghai, China 20061

www.honeywellprocess.com

34-ST-03-122
August 2017

©2017 Honeywell International Inc.

Honeywell